


Low Voltage 51.2V Wall Mounted Lithium Battery Pack

UW-200-51.2

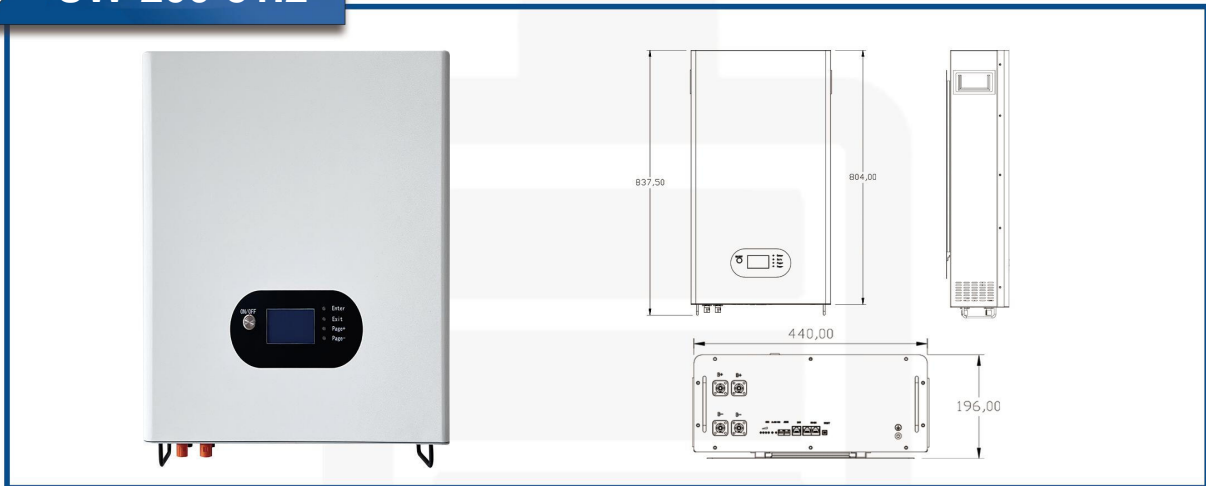

Performance Parameter

Product	Nominal Voltage	Nominal Capacity	Dimension	Weight
51.2V200AH	DC51.2V	200AH	440*804*196MM	104KG
Nominal Voltage (V)	51.2			
Nominal Capacity (WH)	10240			
Usable Capacity (WH)	9216			
Discharge Voltage (V)	46			
Charge Voltage (V)	56			
Recommend Charge/ Discharge Current (A)	100			
Max. Charge/ Discharge Current(A)	200 (3S)			
Communication	RS485/CAN/Bluetooth(Optional)			
Working Temperature	0-40°C			
Storage Temperature	-20-70°C			
Humidity	10%-80%			
Certification	CE/ IEC/ UN38.3/ MSDS			
Design Life	10 years+			
Cycle Life	≥6000@90%DOD(25±5°C)			
Electrical Design Redundancy	> 20%			